


13.Noise Suppressor

A: REMOVAL


1. SEDAN MODEL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the rear quarter trim. <Ref. to EI-61, SEDAN MODEL, REMOVAL, Rear Quarter Trim.>
- 3) Remove the curtain airbag module. <Ref. to AB-21, REMOVAL, Curtain Airbag Module.>
- 4) Disconnect harness connector from noise suppressor.
- 5) Remove the harness clip.
- 6) Remove the screws and detach the noise suppressor.

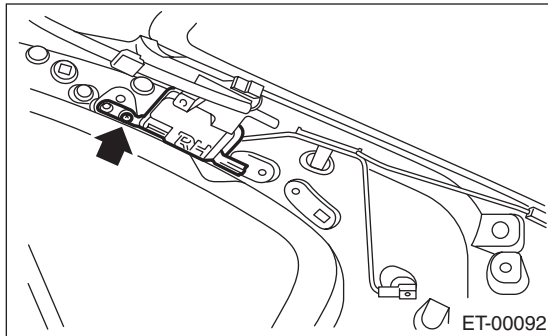

2. WAGON MODEL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the rear gate trim. <Ref. to EI-66, REMOVAL, Rear Gate Trim.>
- 3) Disconnect harness connector from noise suppressor.
- 4) Remove the screws and detach the noise suppressor.

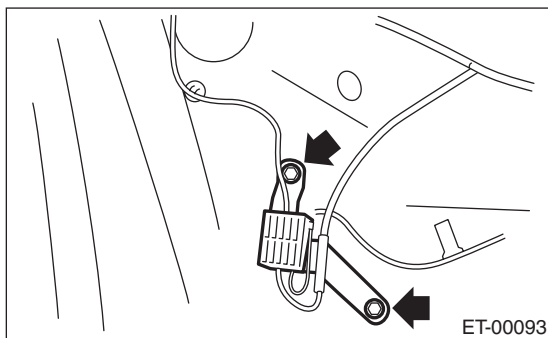

B: INSTALLATION

Install in the reverse order of removal.