


6. Audio


A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console box. <Ref. to EI-52, REMOVAL, Console Box.>
- 3) Remove the console front panel. <Ref. to EI-53, REMOVAL, Center Console.>
- 4) Remove the console side garnish. <Ref. to EI-53, REMOVAL, Center Console.>

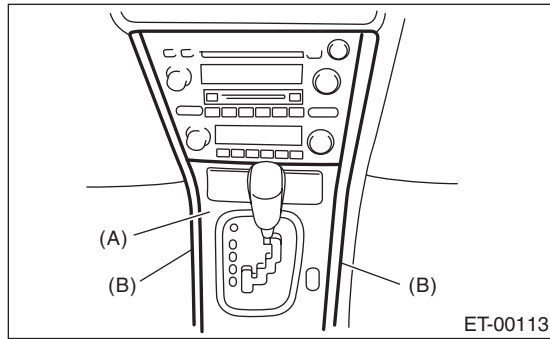

- (A) Console front panel
- (B) Console side garnish

- 5) Remove the screws, and partially pull the audio out from center console.

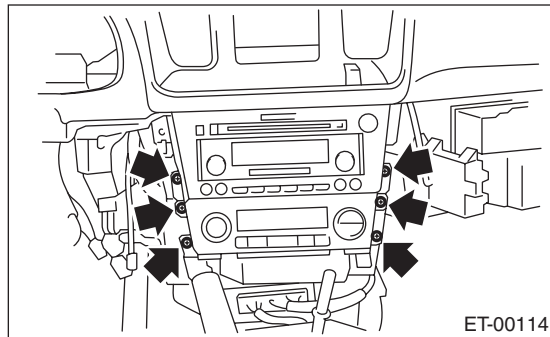

- 6) Disconnect the harness connector and antenna feeder cord, and then remove the audio.

B: INSTALLATION

Install in the reverse order of removal.