


5. Radio Body

A: REMOVAL


- 1) Disconnect the ground cable from the battery.
- 2) Remove the front cover. <Ref. to EI-38, REMOVAL, Console Box.>
- 3) Affix the thick protective tape (A) to the instrument panel pad to protect the surface.

NOTE:

Affix the protective tape so that it covers the vertical wall in the back of the gap between the panel center and the pad.

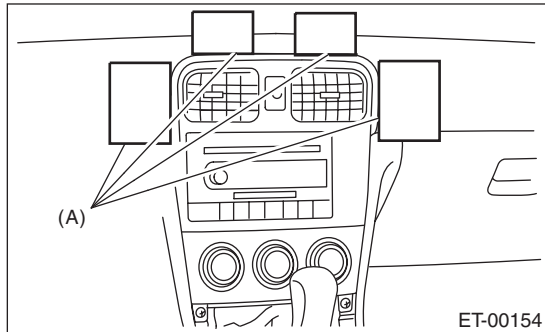

- 4) Remove the screws.

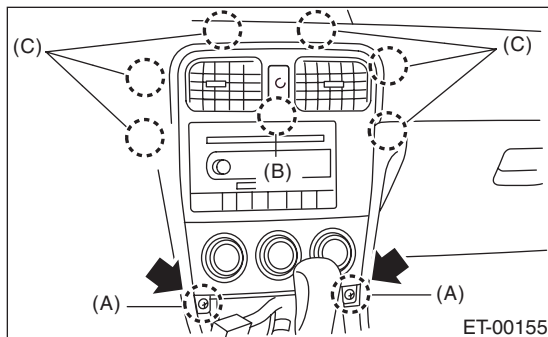


- (A) Screw
- (B) Clip
- (C) Claw

- 5) While pulling on the lower portion of the center console panel, insert a flat tip screwdriver into the portion (A) to remove the claw.

CAUTION:

Be very careful because it is possible to damage the instrument panel if the flat tip screwdriver is inserted into any other area than specified.

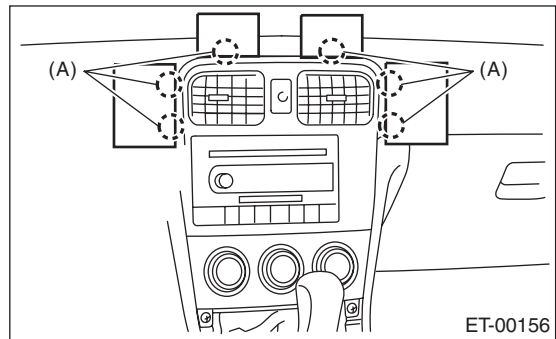

(A) Position for inserting the flat tip screwdriver

- 6) Disconnect the connector.
- 7) Remove the fitting screws, and slightly pull the radio out from the center console.
- 8) Disconnect the harness connectors and antenna feeder cord.

B: INSTALLATION

Install in the reverse order of removal.