


## 19. Back-up Light Bulb

### A: REMOVAL


#### 1. SEDAN

- 1) Remove the trunk side trim of rear portion.
- 2) Turn the socket and remove the bulb.

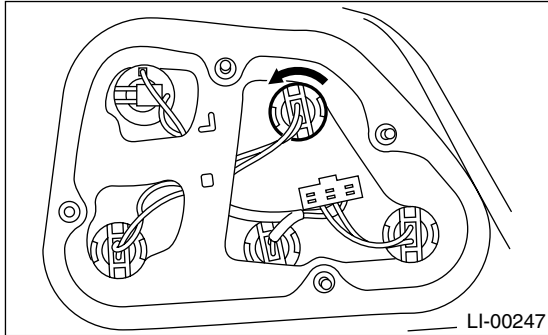

#### 2. WAGON

- 1) Remove the rear combination light assembly.  
<Ref. to LI-20, WAGON, REMOVAL, Rear Combination Light Assembly.>
- 2) Turn the socket and remove the bulb.

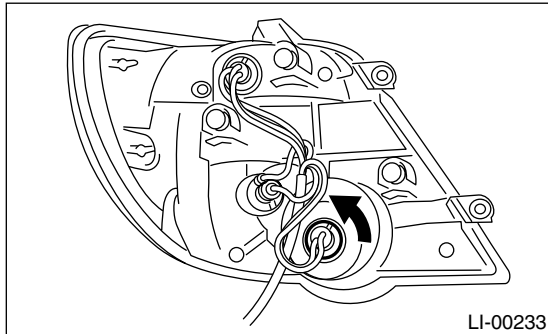

### B: INSTALLATION

Install in the reverse order of removal.

### C: INSPECTION

- 1) Visually check the bulb for blow out.
- 2) Check the bulb specification. <Ref. to LI-2, SPECIFICATIONS, General Description.>
- 3) If NG, replace the bulb with a new one.