


4. Rear Drive Shaft Assembly (AWD Model)

Type of axle shaft assembly	SHAFT
	No. of identification grooves on shaft
79AC	None
79AC-RH	2 (Two)
79AC-LH	1 (One)

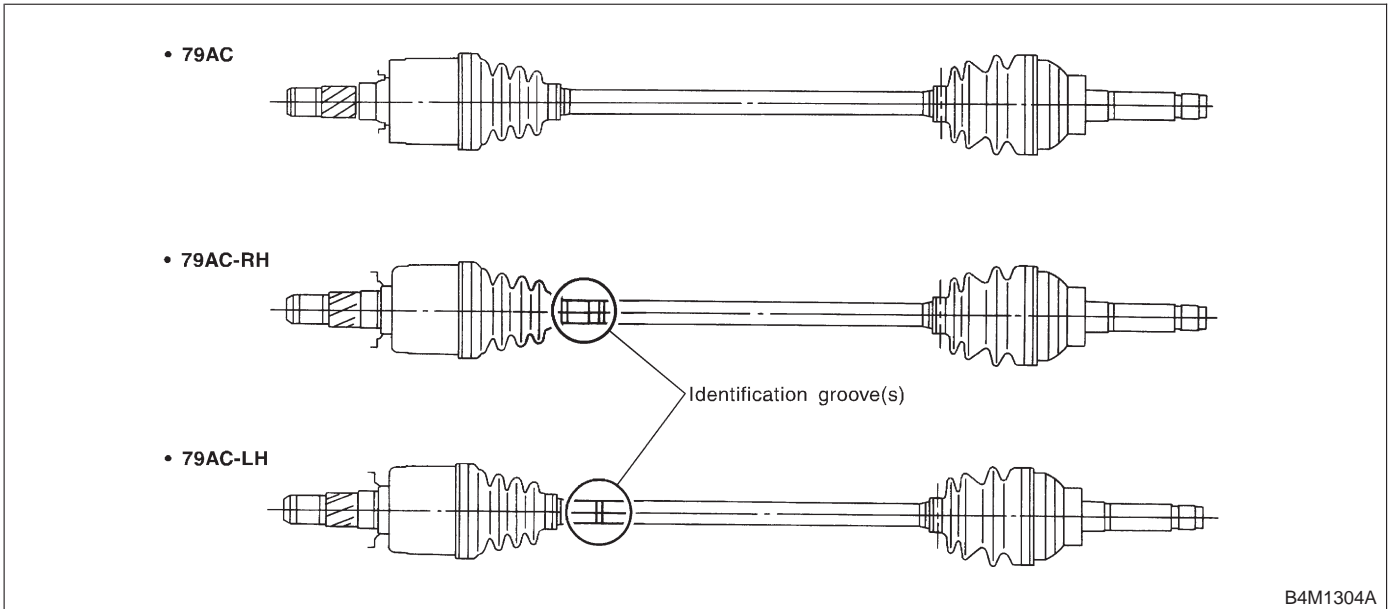

B4M1304A

5. Application Table

Model	Power unit	Front drive shaft		Rear drive shaft	
		5MT	4AT	5MT	4AT
FWD	2200 cc	—	BJ87L+DOJ82RPC-F	—	—
AWD	2200 cc	BJ87L+DOJ82RPC-F	BJ87L+SFJ82	79AC-RH, 79AC-LH	79AC
AWD	2500 cc	BJ87L+DOJ82RPC-F	BJ87L+SFJ82	79AC-RH, 79AC-LH	79AC-RH, 79AC-LH

6. Wheel Balance

	Standard	Service limit
Wheel balancing		
Dynamic unbalance	Less than 5 g (0.18 oz)	

Balance weight part number (For steel wheel)	Weight g (oz)
28101AA001	5 (0.18)
28101AA011	10 (0.35)
28101AA021	15 (0.53)
28101AA031	20 (0.71)
28101AA041	25 (0.88)
28101AA051	30 (1.06)
28101AA061	35 (1.23)
28101AA071	40 (1.41)
28101AA081	45 (1.59)
28101AA091	50 (1.76)
28101AA101	55 (1.94)
28101AA111	60 (2.12)

SPECIFICATIONS AND SERVICE DATA

[S600] 4-2
6. Wheel Balance

Balance weight part number (For aluminum wheel)	Weight g (oz)
23141GA462	5 (0.18)
23141GA472	10 (0.35)
23141GA482	15 (0.53)
23141GA492	20 (0.71)
23141GA502	25 (0.88)
23141GA512	30 (1.06)
23141GA522	35 (1.23)
23141GA532	40 (1.41)
23141GA542	45 (1.59)
23141GA552	50 (1.76)
—	55 (1.94)
23141GA572	60 (2.12)