


6) Position drive axle shaft in differential case and hold it with outer snap ring (28). Using a thickness gauge, measure clearance between the shaft and case is within specifications.

NOTE:

If it is not within specifications, replace snap ring with a suitable one.

Clearance:

0 — 0.2 mm (0 — 0.008 in)

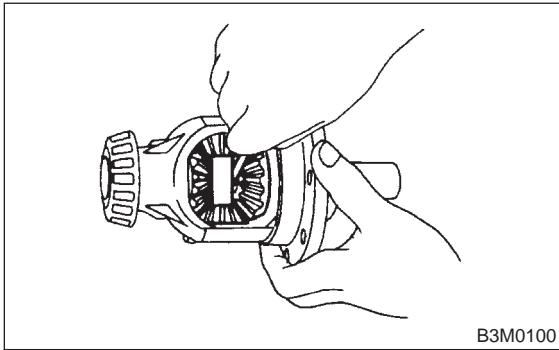

Snap ring (Outer-28)	
Part No.	Thickness mm (in)
805028011	1.05 (0.0413)
805028012	1.20 (0.0472)

7. Center Differential


A: DISASSEMBLY AND ASSEMBLY

1) Remove ball bearing using ST.

CAUTION:

Do not reuse ball bearing.

ST 498077300 CENTER DIFFERENTIAL BEARING REMOVER

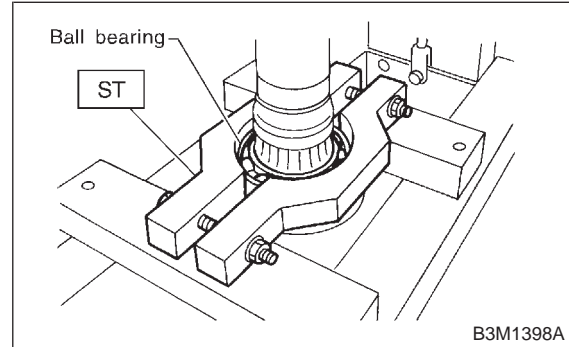

2) Install ball bearing to center differential assembly.

CAUTION:

Do not apply pressure in excess of 10 kN (1 ton, 1.1 US ton, 1.0 Imp ton).

NOTE:

Do not disassemble center differential because it is a non-disassemble part.

